

Stainless pallet truck - hygienic pallet transport

Optimum hygiene - with a stainless pallet truck the risk of bacterial contamination is minimized. The stainless products were developed in cooperation with a Creamery for use in environments where the hygiene demands are severe and where the truck is exposed to an aggressive environment and thorough cleaning.

The design prevents industrial injuries and strain on the user - focus is put on safety and ergonomic working conditions of the user. The ergonomically correct shape of the handle ensures a relaxed hold for the user.

High quality is ensured through an extended test program and in cooperation with experts in Health and Safety.



Technical Specifications

The stainless pallet truck is available in a stainless-plus and a stainless-semi version

- RF-PLUS: Acid-resistant fork chassis. All other parts stainless steel
- RF-SEMI: Acid-resistant fork chassis. Stainless handle, wheel forks, lifting arm and thrust plate. The push rod has a polymer plastic coating and the pump is chromit-treated.

Easy to clean and optimum resistance

- acid-resistant and electric polished fork chassis
- strong surface
- corrosion resistant

Long operating life and low maintenance costs

- strong construction
- AISI316L steel used on the fork chassis



RF-PLUS - for the food industry and the pharmaceutical industry with strict hygiene and sanitation requirements.



RF-SEMI - for the food industry in areas, where hygiene demands are not so high, but corrosion resistance important.



Completely open or completely closed truck elements facilitate efficient cleaning.




Closed forks mean easy cleaning and few hiding places for bacteria.



The pallet truck is also available with different wheels.

Product (measured in inch)	TT RF-PLUS	TT 2081RF-SEMI
Capacity in lbs.	5500	5500
Lifting height	7.5	8
Fork length	32, 38, 45, 48	32, 38, 45, 48, 60
Overall height	20.75	20.75
Fork span	20.5, 27	20.5, 27
Length without forks	13.5	13.5
Overall length	58.25	58.25
Fork width	6.25	6.25
Wheelbase	46	46
Overall height	48	48
Lowered height	2.9	2.9
Load centre	1/2	1/2
Ground clearance	1	1.5
Turning angle of the wheels	230°	230°
Fork wheels - single	Ø2.75 x 3.5	Ø3.25 x 3.5
Fork wheels - tandem		Ø3.25 x 2.75
Steering wheel	Ø7 x 2	Ø7.75 x 2
Weight	150 lbs. (20.5 x 45)	

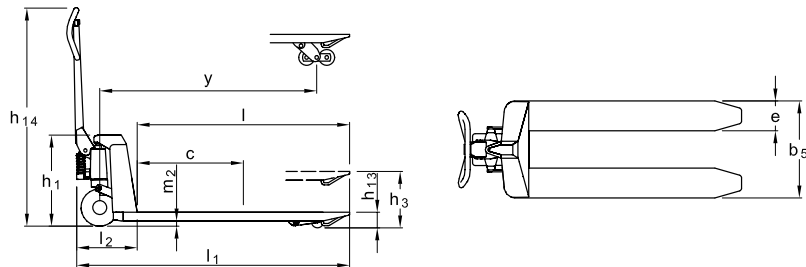

Ergonomic handle ensures the user a relaxed hold.



RF-PLUS pallet truck being used in the pharmaceutical industry.



Wheels with rubber-sealed bearings.

Please ask for specification details or visit our website www.interthor.com
We also offer tailor-made solutions.