

#### Drum Movers and Palletizers

>> [Click to Watch Video](#) <<



#### 82A Series move, palletize and dispense drum


- Lift, Transport, and dispense a drum up to 800 Lb.
- V-Shaped base to service pallet corner
- Service your spill containment pallet up to 20" high
- Rotate drum for pouring
  - Lock drum at horizontal for dispensing
  - Lock drum upright to prevent spills while transporting
- Counterweighted base for stability
- Power-lift options - AC, DC or Air power lift
- Lift standard 55-gallon steel drum
  - Up to 20" above floor in upright position
  - Maximum dispensing height: 26" for horizontal drum
  - Standard 55-gallon steel drum in horizontal position reaches 18.5" beyond the wheels of the V-shaped base
- Insert the correct size [Diameter Adaptor](#) for a smaller drum.

This innovative design combines the V-shaped base to serve the corner of a pallet, with a drum holder to rotate and dispense a drum.

MADE  
IN  
USA



#### Options to Handle Various Drums



#### OPTION: Kit # 4724-P



Install kit # 4724-P to convert to an 82H Drum Palletizer for moving and palletizing an upright drum only. It grips the upper drum rim with jaws, while bracing the side, and has no tilt function.

The **Top Rim Clamp** grips the upper rim of your drum to prevent it from slipping through the drum holder. Use to handle a 55-gallon rimmed plastic or fiber drum. To handle a 55-gallon plastic drum with top rim, you must install either the Bracket Assembly or the Top Rim Clamp.

Part # 4560-P  
Top Rim Clamp Assembly.

Part # 4560M-P  
Spark Resistant Top Rim Clamp Assembly.

The **Bracket Assembly** provides a brace at top and bottom of your drum to prevent it from slipping lengthways through the drum holder. The Bracket Assembly is required to handle a rimless plastic drum, and recommended to more securely handle a fiber drum. It adjusts for 31" to 39" tall drum.

Part # 4556-P  
Bracket Assembly.

Part # 4556M-P  
Spark Resistant Bracket Assembly.

[Diameter Adaptors](#) for a smaller diameter drum fit inside the drum holder. Choose the correct size to handle each size of smaller drum. They install easily without tools, and are quickly removed.

Diameter Adaptors for 17.5" diameter or smaller have brackets at top and bottom of the drum. They adjust for a drum up to 38" tall.


Spark resistant and stainless steel Diameter Adaptors are also available.

Model #	Drum Palletizer / Pourer Description	Motor	Lift Controls	Options			
				Top Rim Clamp	Bracket Assembly	Diameter Adaptors	Kit to Convert to 82H
82A			Manual Hydraulic Pump	4560-P	4556-P	55/30 Series	4724-P
82A-120	AC Power Lift	1PH/115V/60Hz, TEFC Motor		4560-P	4556-P	55/30 Series	4724-P
82A-124	Air Power Lift			4560-P	4556-P	55/30 Series	4724-P
82A-125	Battery Power Lift *	12V DC Motor*		4560-P	4556-P	55/30 Series	4724-P
82AM	Spark Resistant Parts, Hand Pump Lift		Manual Hydraulic Pump	4560M-P	4556M-P	55/30M Series	
82AM-124	Spark Resistant Parts, Air Power Lift			4560M-P	4556M-P	55/30M Series	

\* 12V DC Power Lift includes battery, and 100/220V 50/60Hz AC charger.

### Manual Lift Models

Hand Pump to raise drum.

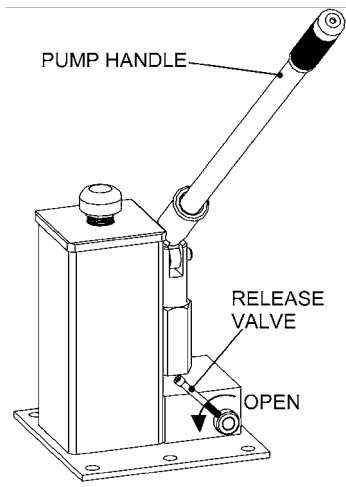


**Hand Pump Lift Control**  
**Models 82A and 82AM**

It takes 27 pumps of the hand pump to lift a drum to maximum height.


### Models with Power Lift

Models with power lift provide a more ergonomic means of raising your drum.

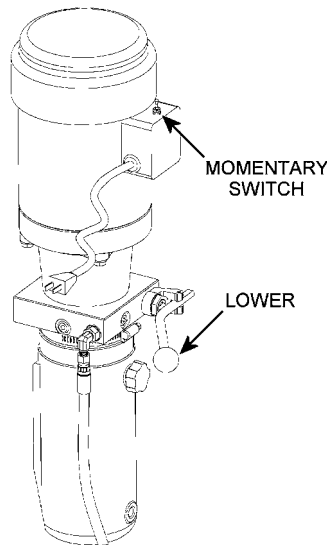


**Electric Power Lift Controls**  
**Model 82A-120**

Use switch to raise the drum. Lower the drum with manual release valve.



**Air Power Lift Controls**  
**Models 82A-124 and 82AM-124**

Use on / off valve to raise and lower the drum.

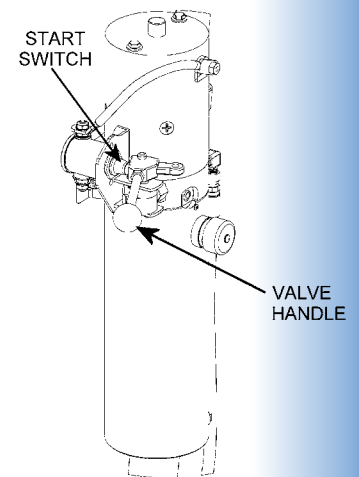


**Battery Power Lift Controls**  
**Model 82A-125**

Self contained battery power-lift. Use valve to raise and lower the drum. 12V deep cycle battery and separate charger are included.

### Dimensions

- Overall width: 48.5" (123.2 cm)
- Overall length: 43" (109.2 cm)
- Turning radius: 53" (135 cm)
- Legs are 9" (22.9 cm) high and reach 20.75" (52.7 cm) in front of upright stanchion
- (2) 4" (10.2 cm) swivel casters at back
- (2) 6" (15.2 cm) wheels at front

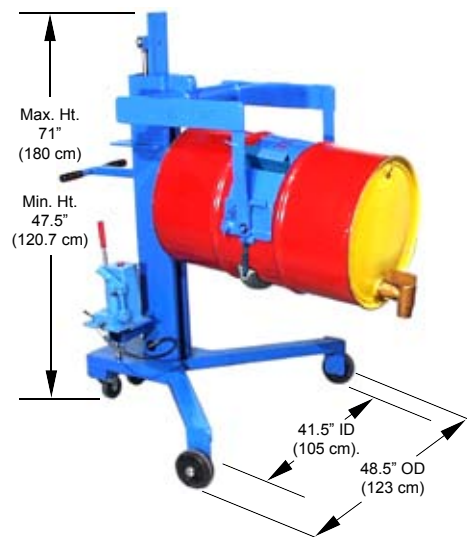

Please contact your Morse dealer