


MODELS 4090HK17 / 4090HK17/20
5.5 HP SINGLE STAGE TWO CYLINDER
PORTABLE GAS COMPRESSORS



MODEL 4090HK17

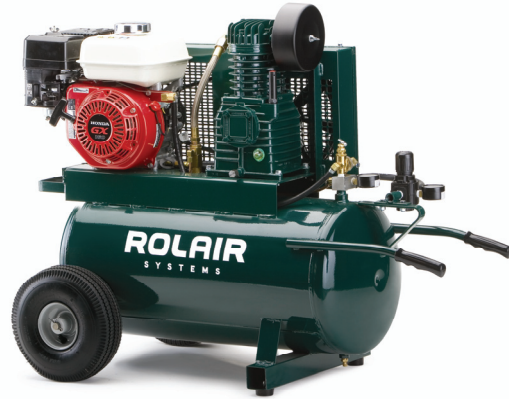

MODEL 4090HK17/20

ROLAIR STANDARD FEATURES

PUMP: ROLAIR Quality, Heavy-Duty, Single Stage, Ball Bearings, Cast-Iron Twin Cylinders, Hardened Steel Valve Plates with Swedish Lamellar Reed Valves, Aluminum Alloy Connecting Rods with Automotive-Style Inserts, Multi-Finned 11" Flywheel, Oil Sight Gauge and Splash Lubrication.

ENGINE: 5.5 HP Honda 4 Cycle, Complete Die Cast Aluminum Alloy with Cast-Iron Sleeve, Overhead Valves, Retractable Starter, On/Off Switch, Splash Lubricated, Low Oil Shutdown

TANK ASSEMBLY: Non-Code, 9 Gallons (optional 20 Gallon Tank)

WHEELS: One 410/350 x 4
2-Ply Fully-Pneumatic *with Sealant*
(4090HK17/20 uses two wheels)

PERFORMANCE @ 100 PSI:

Cu. Ft. Displaced - 13.1
Cu. Ft. Free Air - 8.9

DIMENSIONS:

L46" x W19" x H28" - 4090HK17
L47" x W22" x H34" - 4090HK17/20

APPROXIMATE SHIPPING WEIGHT:

174 lbs.—4090HK17
198 lbs.—4090HK17/20

STANDARD EQUIPMENT

- Automatic Pilot Valve Operation
- Industrial Flexible Discharge Hose
- Automatic Idle Control for Economy and Long Service Life
- 110/135 PSI Operating Pressure
- Air-Cooled Aftercooler
- Pressure Gauge 0-200 in 5 lb. Graduations
- Intake Filter with Silencer and Replaceable Element
- Schmidt Belt Tightening Device
- Safety Relief Valve
- Totally Enclosed Steel Belt Guard
- Accessory Support Bracket

OPTIONAL EQUIPMENT

Filter-Regulator-Lubricator Sets, Robin Engines