
SHORTY LIFT MASTER BOOM - LMS-EBT-46-6

APPROX WEIGHT: 280 lbs.

OES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE ***
ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

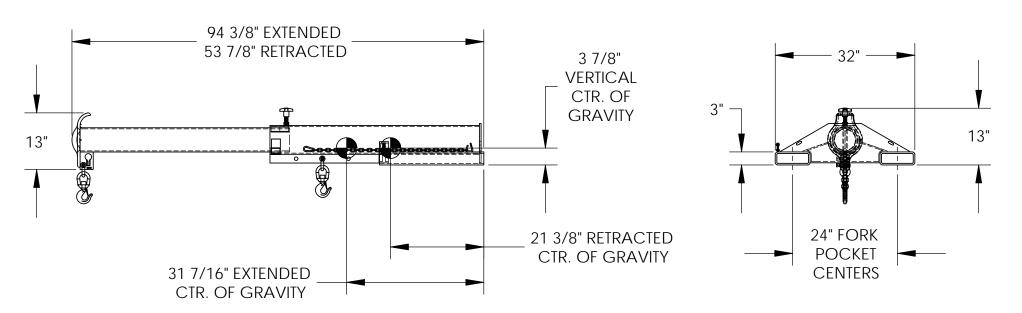

*--MAXIMUM SINGLE HOOK CAPACTITIES

| DISTANCE | 31" | 48" | 60" | 72" | 84" | 92" |
|----------|------|------|------|------|------|------|
| CAPACITY | 6000 | 5000 | 4500 | 4000 | 3500 | 3000 |

STANDARD FEATURES

SPECIAL FEATURES

NONE

MODEL NUMBER: LMS-EBT-46-6

CAPACITY: 6,000 LBS LOST LOAD - 403 LBS OVERALL HEIGHT - 13"

LENGTH (EXTENDED) - 94 3/8" LENGTH (RETRACTED) - 53 7/8"

OVERALL' WIDTH - 32"

USABLE FORK POCKET - 2 1/4 X 7 1/4

24" FORK POCKET CENTERS 31" MINIMUM HOOK POINT

91 1/2" MAXIMUM HOOK POINT

EFFECTIVE THICKNESS: LESS THAN 1"
NEVER EXCEED LOAD CENTER RATING PER FORK TRUCK

MANUFACTURER'S GUIDLINES

DO NOT USE THIS FORK TRUCK ATTACHMENT IF LOAD WILL EXCEED FORK TRUCK MANUFACTURER'S LOAD CENTER RATING.

| A P P R O V | I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS. ALL SPECIAL UNITS ARE NON-RETURNABLE [] As drawn [] As marked |
|-------------|--|
| A | Signed:Date: |
| L | LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING |
| ISTRI | BUTOR'S NAME: P.O.# |

| 01 0101125 | 7 (1 1 1 (O 1) (L D 1 () (1) | |
|---------------------|------------------------------|------------|
| DISTRIBUTOR'S NAME: | P.O.# X | |
| VESTIL MANUFAC | W.O.# X | |
| DEY | DATE: 6/29/12 | SALES: X |
| reference: X | SCALE: 1:22 | |
| DUOTED LEAD TIME: X | QUOTE # X | 08-007-211 |