


HIGH-RISE BOOM - LM-HRT-6-24

APPROX WEIGHT: 976.75 lbs.
DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE ***

ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

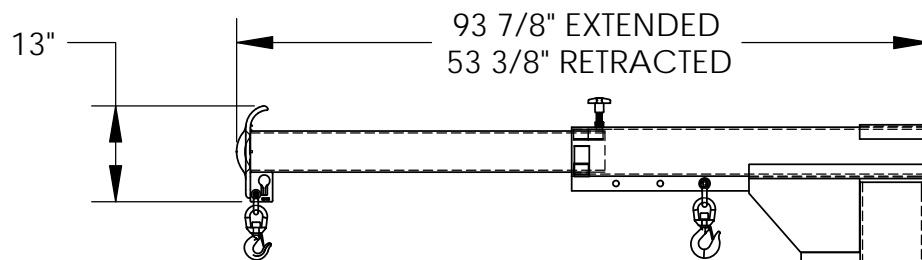

STANDARD FEATURES

MODEL NUMBER: LM-HRT-6-24
CAPACITY: 6,000 LBS
LOST LOAD - 980 LBS
OVERALL HEIGHT - 79 7/8"
OVERALL LENGTH (EXTENDED) - 93 7/8"
OVERALL LENGTH (RETRACTED) - 53 3/8"
OVERALL WIDTH - 32"
USABLE FORK POCKET - 2 1/4 H x 7 1/4 W
24" FORK POCKET CENTERS
30" MINIMUM HOOK POINT
90" MAXIMUM HOOK POINT
EFFECTIVE THICKNESS: LESS THAN 1"

SPECIAL FEATURES


NONE

10 1/16" RETRACTED
CTR. OF GRAVITY


13 1/8" EXTENDED
CTR. OF GRAVITY

30 3/4" VERT.
CTR. OF
GRAVITY

24"

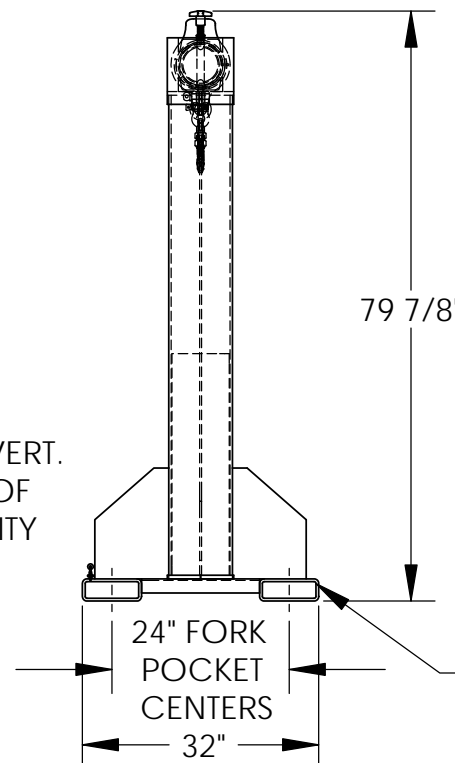

USABLE FORK POCKETS
2 1/4 H X 7 1/4 W

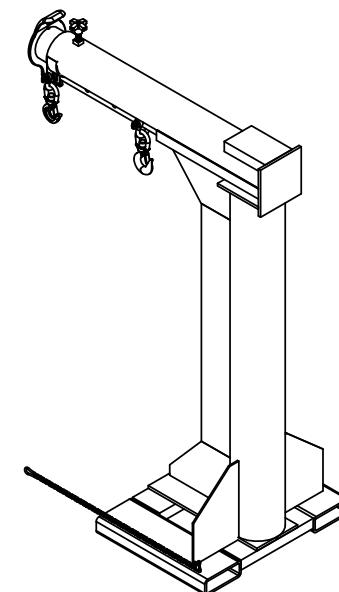

* 3D VIEW SHOWN
FOR REFERENCE *

*--MAXIMUM SINGLE HOOK CAPACITIES

DISTANCE	30"	36"	42"	48"	54"	60"	66"	72"	78"	84"	90"
CAPACITY	6000	5000	4500	4000	3500	3000	2600	2300	2000	1800	1550

APPROVAL

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.
ALL SPECIAL UNITS ARE NON-RETURNABLE
[] As drawn [] As marked

Signed: _____ Date: _____

LEAD TIME WILL START UPON RECEIPT
OF SIGNED APPROVAL DRAWING

DISTRIBUTOR'S NAME:

VESTIL MANUFACTURING

DRAWN BY: ND

DATE: 8/6/07

REFERENCE: X

SCALE: 1:26

QUOTED LEAD TIME: X

QUOTE # X

P.O.# X

W.O.# X

SALES: X

FILE NAME:

08-007-006

OPTIONAL FEATURES

***LARGER FORK POCKETS
(LM-FP) 8-1/4"W x 4-1/4"H ID

NEVER EXCEED LOAD CENTER RATING PER
FORK TRUCK MANUFACTURER'S GUIDELINES.
DO NOT USE THIS FORK TRUCK ATTACHMENT
IF LOAD WILL EXCEED FORK TRUCK
MANUFACTURER'S LOAD CENTER RATING.